














Información técnica - Specifications

											
	cond	comp. W	ABS. W	Fuse	Kwh/100Kg	l / h	kg	Lbs	kg	Lbs	Ton CO2 equiv.
E60 A		1250	570	10	27.1	5.81	52	114	60	132	0.27
E60 W		1250	520	10	19.13	65.4	50	110	58	128	0.29



24h Producción de Hielo - Ice Production

Sistema de enfriamiento por aire - Air Cooled Unit

Temp. Aire Air Temp. °C	Temp. Agua / Water Temp.			
	32°	21°	15°	10°
°F	90°	70°	60°	50°
10°	53	57	59	60
50°	118	125	130	132
21°	49	52	54	55
70°	108	115	119	121
32°	40	42	44	45
90°	88	93	96	99
38°	35	37	38	39
100°	76	81	83	85

Sistema de enfriamiento por agua - Water Cooled Unit

Temp. Aire Air Temp. °C	Temp. Agua / Water Temp.			
	32°	21°	15°	10°
°F	90°	70°	60°	50°
10°	45	53	56	58
50°	106	117	123	128
21°	47	51	54	56
70°	104	112	119	123
32°	45	49	52	54
90°	99	108	115	119
38°	44	48	50	52
100°	97	106	110	115

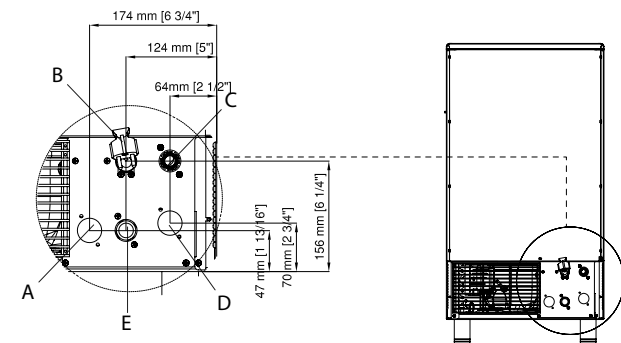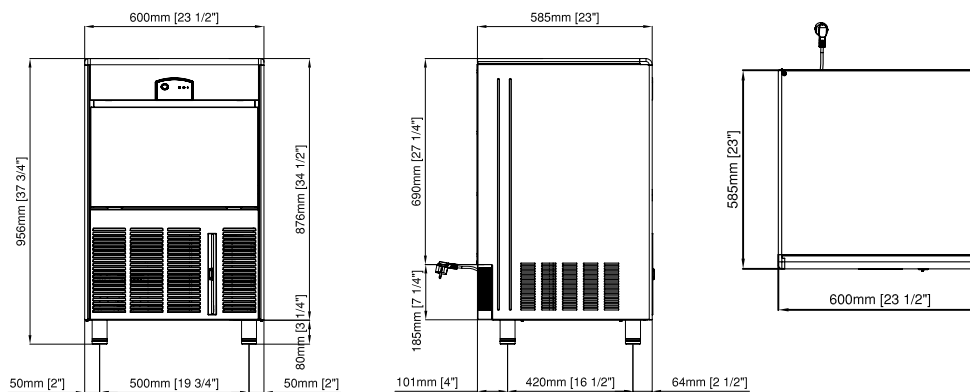

- (A)** OPTIONAL: Entrada agua condensador por agua - 3/4" gas
OPTIONAL: Entrée de l'eau pour condenseur à eau - 3/4" gas
- (B)** Alimentación eléctrica
Electrical cable supply
- (C)** Drenaje de agua ø 20 mm
Water outlet connection ø 20 mm
- (D)** Drenaje de agua (solo sist. enfr. por agua) ø 20 mm
Water outlet connection water condensation ø 20 mm
- (E)** Entrada agua 3/4" gas
Water inlet connection 3/4" gas



PLACA DE MANDO - CONTROL PANEL

Rojo: Alarma
Rouge: Alarm

Verde: Estado maquina
Vert: État de la machine



Boton On/Off
Interrupteur On/Off

Boton de reset
Buton reset

CAPACIDAD DEL DEPÓSITO - BIN CAPACITY


28 Kg - 62 lbs
1648 pcs

DIMENSIONES - DIMENSIONS

LxPxH (mm)
600 x 585 x 956


WxDxH (inch)
23 10/16" x 23 1/16" x 37 10/16"

TIPO DE HIELO - ICE TYPE



17g

PESO HIELO
POIDS GLACE







35

PIEZAS / CYCLE
PIÈCES / CYCLE

CONDICIÓN DE USO-OPERATING REQUIREMENTS



220-240V / 1 / 50Hz R134a GWP=1430

MIN		MAX
10°C (50°F)		40°C (104°F)
5°C (41°F)		35°C (95°F)
- 10 %		+ 10 %
1 BAR (14 PSI)		5 BAR (70 PSI)