

MV Cube Ice Machines up to 240 Kg




MV 456 with B393 (sold separately)

Standard Features

- **"Global Standard" width-** 30" (76.20 cm) wide
- **Auto-Alert indicator lights-** communicate about operating status: a diagnostic LED light guides the troubleshooting process and helps decisions regarding opening a service call.
- **Front-facing Evaporator-** Ice forming process inspection and routine cleaning operations may be accomplished simply removing the front panel.
- **Hand-removable water distribution tube-** routine cleaning has never been so easy!
- **Embedded antimicrobial-** Ag-Ion® antimicrobial is present in selected food-zone components
- **External Components-** All external panel components are crafted for optimal aesthetic appeal through superior fit and finish
- **Reusable air filter** is easily removable from the outside for ease of cleaning (in air-cooled models)
- **California Energy Commission-** meets or exceeds CEC guidelines

MV456 Technologies



MV456+B393 (sold separately)



MV456+B530 (sold separately)



MV456+B550+KBT253 (sold separately)



MV456+B948+KBTMV948 (sold separately)



MV456+B1025 (sold separately)

	 +C° -C°	21°: 10°C		32°: 21°C		 D W H
		[kg] [lbs]	N°	[kg] [lbs]	N°	
MV456 AS		220 485	22000	155 342	15500	[WxDxH mm] 760x620x575
MV456 WS		215 474	21500	185 408	18500	[WxDxH inches] 2915/16" x 247/16" x 2210/16"
MVH456 AS		220 485	36520	155 342	25730	 [v/Hz/ph] 220-240/50/1
MVH456 WS		215 474	35690	185 408	30710	



This product qualifies for the following listings:



Dice Cube - 10 g
23 x 23 x 26 mm



Half Dice Cube - 6 g
11 x 23 x 26 mm

2 Years Warranty


Subject to certain limitations and exclusions

Certified ISO 9001:2000

www.scotsman-ice.com
www.scotsman-ice.it

Models and specifications are subject to change without notice.

MV Cube Ice Machines up to 240 Kg

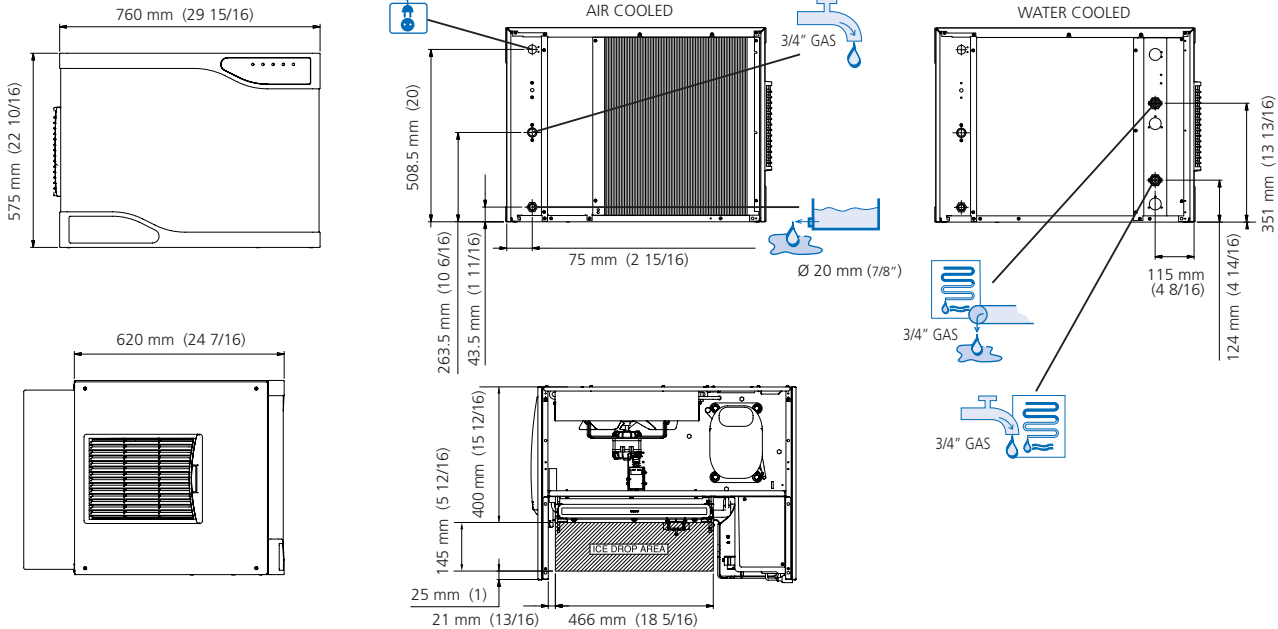

MV456 AIR COOLED

°C / °F	50°	60°	70°	90°	kg
	10°	15°	21°	32°	
10°	240	230	215	185	kg
50°	529	507	474	408	lbs
21°	220	215	200	175	kg
70°	485	474	441	386	lbs
32°	165	160	155	135	kg
90°	365	353	342	298	lbs
38°	140	138	133	120	kg
100	309	302	293	265	lbs



MV456 WATER COOLED

°C / °F	50°	60°	70°	90°	kg
	10°	15°	21°	32°	
10°	220	215	200	175	kg
50°	485	474	441	386	lbs
21°	215	210	195	170	kg
70°	474	463	430	375	lbs
32°	197	192	185	160	kg
90°	434	423	408	353	lbs
38°	190	185	180	155	kg
100	419	408	397	342	lbs



Minimum	Maximum
10°C (50°F)	40°C (104°F)
5°C (41°F)	35°C (95°F)
-10%	+10%
1 BAR 14 psi	5 BAR 70 psi

	+C° -C°	[Btu/h] [W]	[Ømm²]	[W]	FUSE	[kWh] - 100 Kg	[Wh]	[gal/h]	[kg] [lbs]	[kg] [lbs]
MV456 AS	🌀	9000 2650	3x1,5	1000	16 A	14.8	12 3,2	70 154	85 187	
MV456 WS	💧	9000 2650	3x1,5	850	16 A	10.6	128 33,8	70 154	85 187	
MVH456 AS	🌀	9000 2650	3x1,5	1000	16 A	14.8	12 3,2	70 154	85 187	
MVH456 WS	💧	9000 2650	3x1,5	850	16 A	10.6	128 33,8	70 154	85 187	

CONTACT POINTS: